

## About 11.22.2.38 firmware—FI8918W

### 1. New features of this firmware

- 1) Support setting schedule more conveniently.
- 2) Support changing the upload image name for FTP.
- 3) Support setting the automatic patrol circles.
- 4) Add the option to turn off the alarm beep sound when alarm activated.
- 5) Add preset in Firefox, Google chrome and Safari.
- 6) Support saving fps.

### 2. Resolved bugs

- 1) Fix display issues on some language pages.
- 2) Fix the issue about saving recording path.

### How to use the new function

- ✧ How to set schedule easily.
- ✧ How to change the upload image name for FTP.
- ✧ How to turn off the alarm beep sound.

#### 1) How to set schedule easily.

If you want the camera to alarm during a special time, you need to set **Scheduler** and set time range.

If you want to select the special hours between Monday to Sunday, you can click any number in the “Set” line between 00 and 23 at the first row, the corresponding column will be selected and it will turn blue. For example, click the number “06” at the first row, you can see the column turn blue. That means the camera will alarm when motion is detected between 6 and 7 o'clock (Figure 1) during everyday. Click the number “06” at the second row which marked “Clear”, you can cancel the corresponding column you set. And it will turn gray.

**Alarm Service Settings**

Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10 <small>▼</small>
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input checked="" type="checkbox"/>

Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Figure 1

If you want to select a single area, you can click left button on the box of time range. It will turn blue. If you want to delete it, just click the left button again and it will turn gray. (Figure 2)

**Alarm Service Settings**

Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10 <small>▼</small>
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input checked="" type="checkbox"/>

Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Figure 2

If you want the camera alarm at most time, you can select “set All” first and then click left button at the box you don’t want the camera alarm even when the motion

is detected. The box will turn gray. Click Submit and it will take effect. (Figure 3)

Alarm Service Settings	
Motion Detect Armed	<input checked="" type="checkbox"/>
Motion Detect Sensibility	10
Motion Compensation	<input type="checkbox"/>
Send Mail on Alarm	<input type="checkbox"/>
Upload Image on Alarm	<input type="checkbox"/>
Scheduler	<input checked="" type="checkbox"/>

Set	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Clear	00	01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Day	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
Sun																								
Mon																								
Tue																								
Wed																								
Thu																								
Fri																								
Sat																								

Figure 3

## 2) How to change the upload image name for FTP.

FTP Service Settings	
FTP Server	ftp.mgenseal.com
FTP Port	21
FTP User	deotest@mgenseal.com
FTP Password	•••••
FTP Upload Folder	/
FTP Mode	PORT
	<input type="button" value="Test"/> Please set at first, and then test.
Upload Image Now	<input checked="" type="checkbox"/>
Upload Interval (Seconds)	30
Enable Set Filename	<input checked="" type="checkbox"/>
Filename	test

Figure 4

“Enable Set Filename”, you can set a name for the uploaded images when you enable the checkbox. If you check it, the uploaded image will be named after the filename you set. So the next image will cover the last image and the FTP Upload Folder will only have one image which named as the filename you set.

Filename: Fill in a name for the uploaded image.

**Note:** We can change image name when there is none alarm, cannot change the upload images name when alarm triggered.

In other words, changing filename only work for none alarm pictures.

### 3) How to turn off the alarm beep sound.

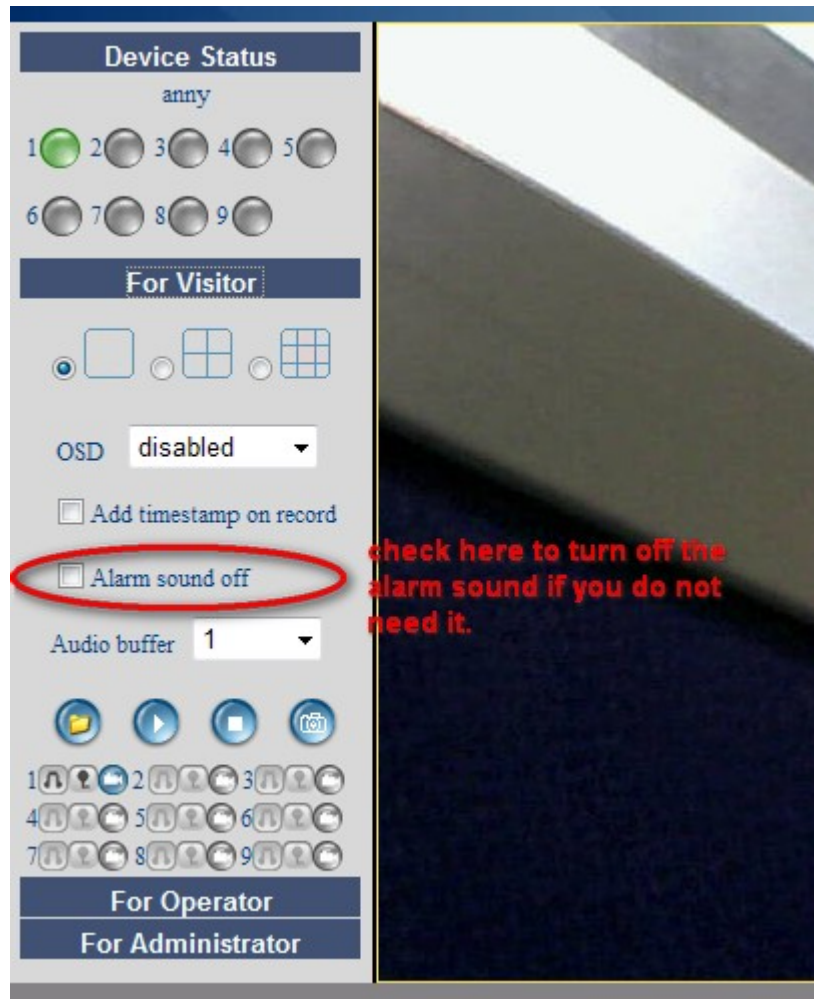


Figure 5

Choose “Alarm sound off” option, when motion triggered, the beep sound will be turn off.